




EDGE DRILLING RIG 6

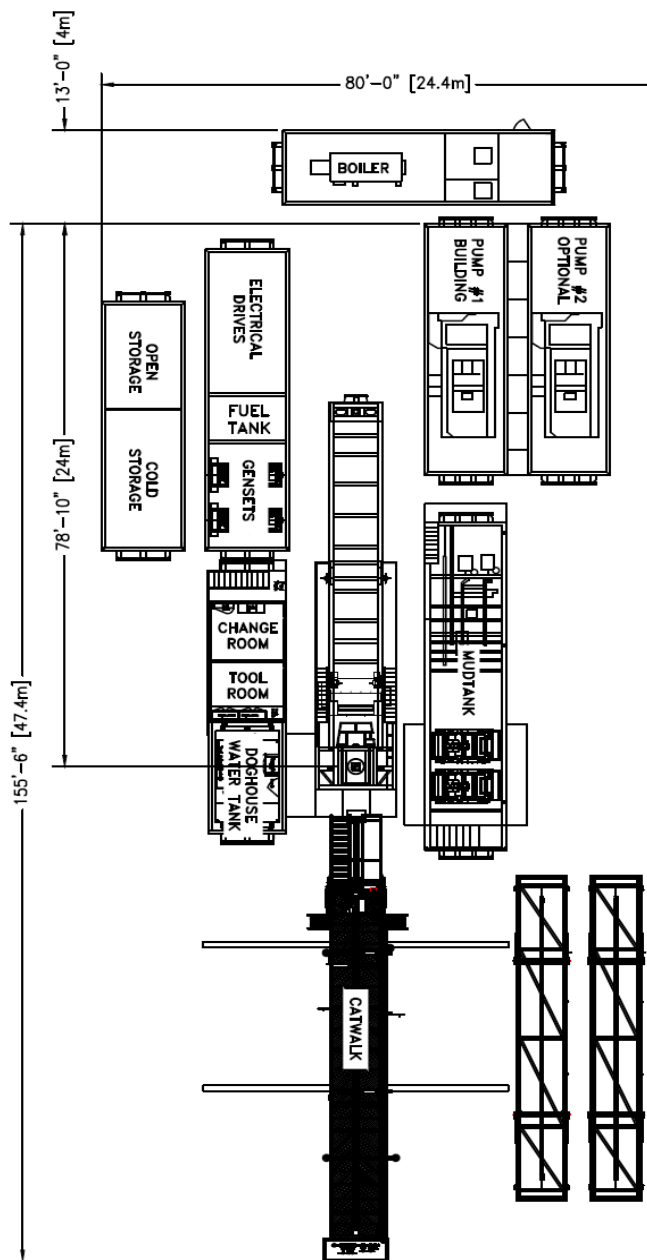

2,800m TVD W/ 4" DRILL PIPE STIFF MAST RING III SINGLE 5,000psi CIRCULATING SYSTEM

DRAWWORKS

RIGMASTER E30AC
OEM 600HP AC TRACTION MOTOR

SUBSTRUCTURE

FOREMOST TRAILER ROTARY CAPACITY: 88,960daN (200,000LB)
FLOOR HEIGHT: 3.35m (11'-0")
ROTARY TABLE: ENID 520mm (20.5") HYDRAULIC
DETROIT S60 HPU

MAST

24.6m (80') FOREMOST TWIN BOOM RING III
RATING: 102,300daN (230,000LB) 6 LINES

OVERHEAD EQUIPMENT

FOREMOST 150 TON INTEGRATED BLOCK

TOP DRIVE

FOREMOST 150T HYDRAULIC
TORQUE: 23,000FT/LBS LOW GEAR @ 65 RPM

MUDPUMPS (x2)

(1) MD-9 1000HP w/ 1150HP AC TRACTION MOTOR VFD DRIVE
(2) MD-9 1000HP w/ DETROIT 12V2000

MUDTANKS

TOTAL VOLUME: 65m³ (400BBL) 4 COMPARTMENTS
2 AGITATORS, (2) 5x6x11 MISSION MIXING PUMPS
SHAKERS: (2) MI SWACO MONGOOSE

B.O.P.'S/MANIFOLD

279mm (11") SK, RATING: 21,000kpa (3,000psi)
50.8mm (2") x 35,000kpa (5,000psi)
MANIFOLD 76.2mm (3") GUTLINE

GEN SETS (2)

DETROIT 60 SERIES 60 W/ STAMFORD GENERATOR
500kw 600v 100amp SERVICE
1000HP VFD PUMP DRIVE
600HP VFD DRAWWORKS DRIVE

ACCUMULATOR

MANUFACTURER: CONTROL TECHNOLOGY
21,000kpa (3,000psi) 5-FUNCTION, 2-STATION PLC

BOILER

MANUFACTURER: SASKATOON 100HP DOUBLE PASS
6,000L (1600GAL) FUEL STORAGE

MISC

FUEL CAPACITY: 18,500L (4,900 GALLONS)
WATER TANK CAPACITY: 50m³ (315BBL)
HYDRAULIC CATWALK W/ POWERED SKATE

TUBULARS

AS PER OPERATORS REQUIREMENTS.