




EDGE DRILLING RIG 2

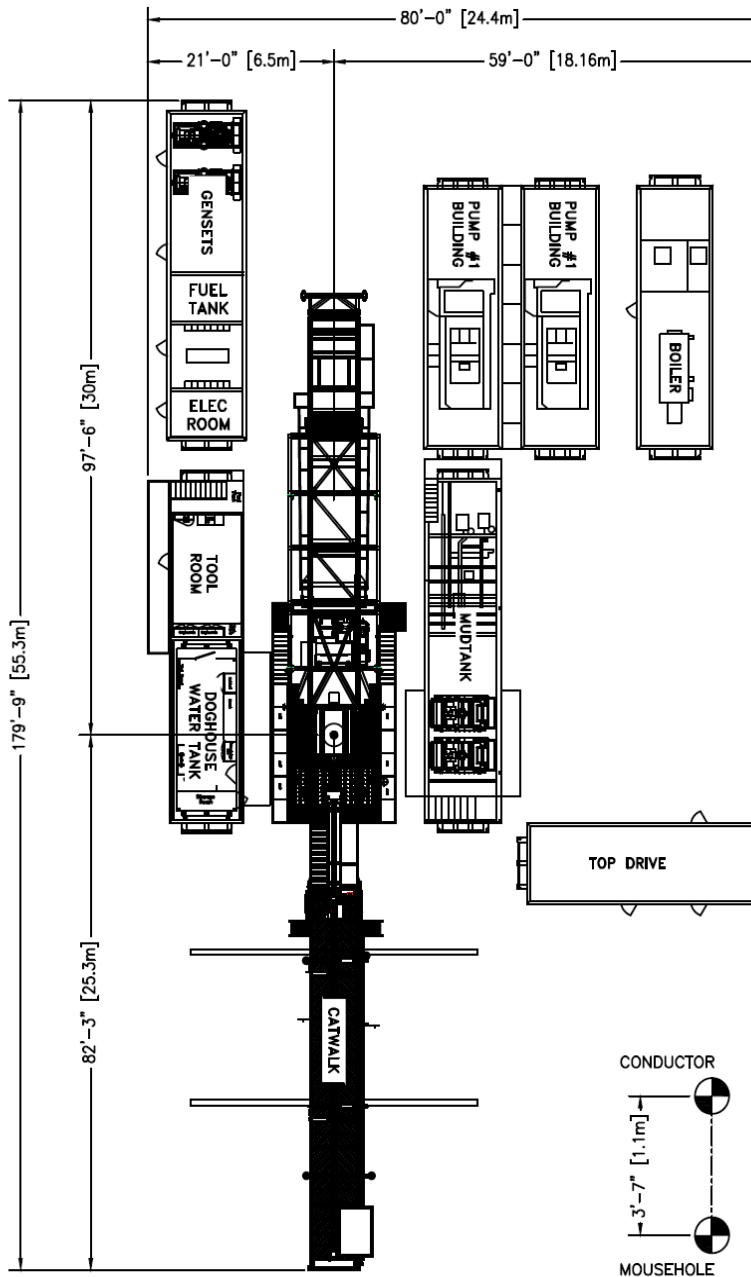

4,000m TVD TELESCOPIC DOUBLE 5,000psi CIRCULATING SYSTEM

DRAWWORKS

TSM 850

DETROIT S60 W/ALLISON CLT6061 TRANSMISSION

SUBSTRUCTURE

X-TREME ENERGY STEPDOWN

ROTARY CAPACITY: 178,000daN (400,000LB)

SETBACK CAPACITY: 167,000daN (375,000LB) FLOOR

HEIGHT: 4.77m (15'-6")

ROTARY TABLE: LZ PETROLEUM 175,444mm (17 1/2")

MAST

X-TREME ENERGY 32m (105') TELESCOPIC DOUBLE RATING:

178,000daN (400,000LB) 10 LINES

4950M RACKING CAPACITY (133MM TJ)

OVERHEAD EQUIPMENT

BLOCK: MCKINNEY ARCTIC T-250 W/ BECKETT 222,400daN (500,000LB)

TOP DRIVE

TESCO 250 HMI 475HP

19,000FT/LBS CONTINUOUS TORQUE AT 85RPM

MUDPUMPS (x2)

PZ-11 115spm 35,000kpa (5,000psi)

CATERPILLAR C32 W/ PACRIM 2 SPEED GEARBOX

MUDTANKS

TOTAL VOLUME: 80m³ (500BBL)

4 COMPARTMENTS

3 AGITATORS, (2) 5x6x11 MISSION MIXING PUMPS

SHAKERS: BRANDT KING COBRA (2)

B.O.P.'S/MANIFOLD

279mm (11") SK

RATING: 34,000kpa (5,000psi) NACE TRIM

50.8mm (2") x 35,000kpa (5,000psi)

MANIFOLD 76.2mm (3") GUTLINE

GEN SETS (2)

(2) DETROIT 60 SERIES 60 W/ STAMFORD GENERATOR

470kw 480v 100amp SERVICE

ACCUMULATOR

MANUFACTURER: CONTROL TECHNOLOGY

21,000kpa (3,000psi)

5-FUNCTION, 2-STATION PLC

BOILER

MANUFACTURER: HURST

125HP DOUBLE PASS

9,400L (2500GAL) FUEL STORAGE

MISC

FUEL CAPACITY: 23,500L (6,200 GALLONS)

WATER TANK CAPACITY: 80m³ (500BBL)

TUBULARS

AS PER OPERATORS REQUEST